



Aluminium Fencing



The ARC Aluminium Range

ARC specialise in providing aluminium tubular fencing in a range that is stylish, modern and perfect for any area around your business or home. We have a wide range of designs available and can help you choose the perfect solution.

Panels

ARC standard panels are made with 38x25mm rails with 16mm vertical tubes to create over 24 decorative styles and can be powder coated in your choice of colours.

All of our pool fencing designs comply with Australian Standard 1926.1 Customised panels.




Standard widths	Standard heights	
2,400mm 3,000mm	900mm 1,200mm	1,500mm 1,800mm

These can be customised to suit your needs.

Hardware

Fence brackets, plastic caps, gal caps, gate fittings are all available through ARC.

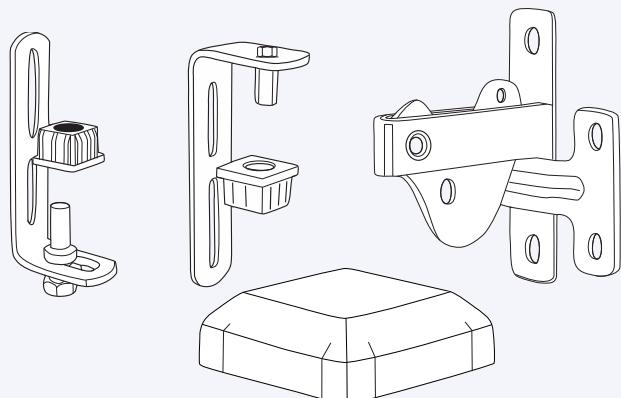

Gates


ARC standard tubular gates are made using 38 x 25mm rails and 16mm vertical tubes.

Standard widths	Standard heights	
-----------------	------------------	--


1,000mm 1,500mm	900mm 1,200mm	1,500mm 1,800mm
--------------------	------------------	--------------------




Fence Styles

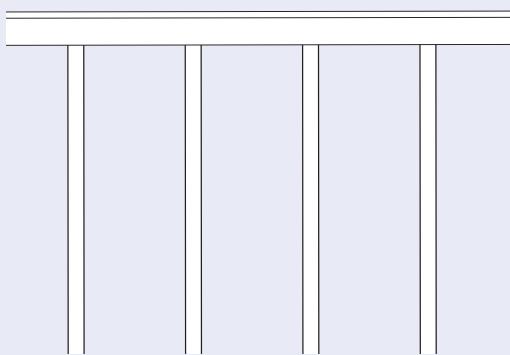


Flat top

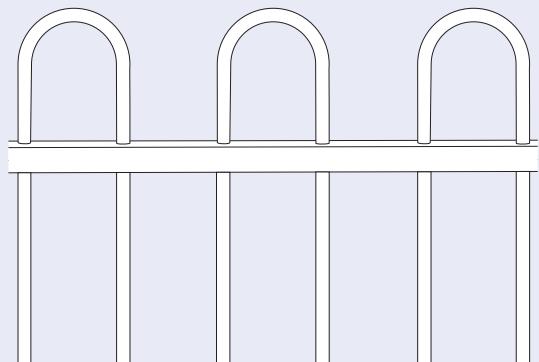


Loop top

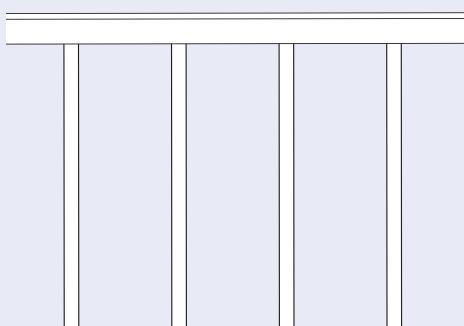


Rod top

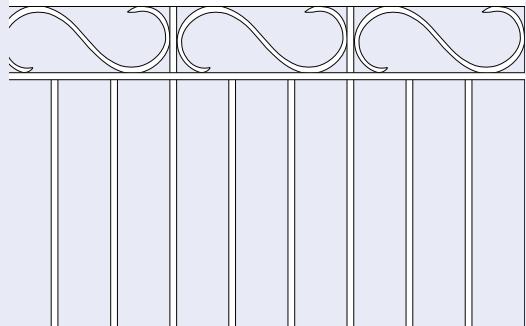


Open rail scroll

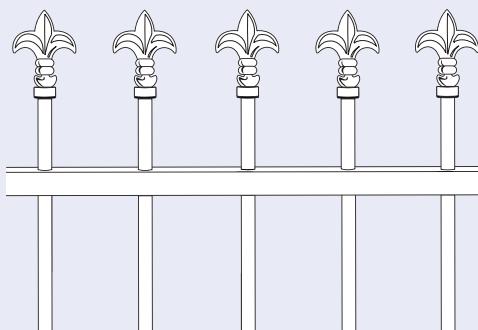


Spear top

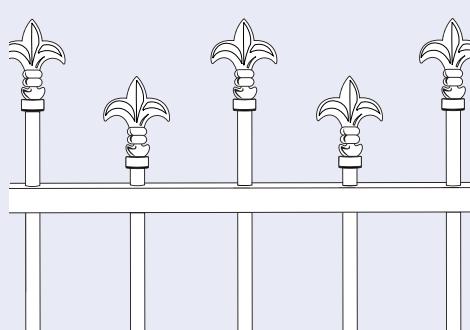

HiLo spear

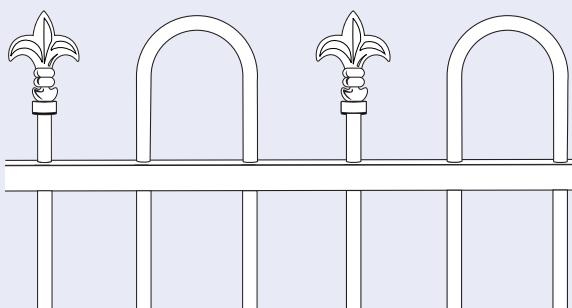

Loop and spear

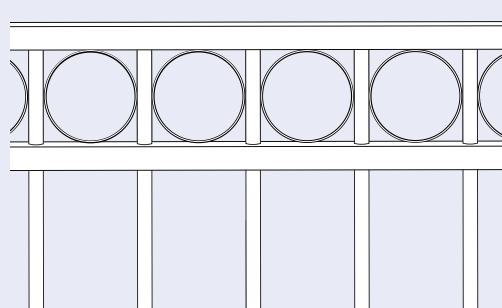

Oxley Ring

Care & Maintenance



Like any other painted surface your powder coated ARC Fence performs at its best when it's properly cared for. Keep the surface free from pollutants and environmental contaminants such as dirt, cobwebs, or salt deposits. This will give you the maximum benefit and long lasting performance from your powder coated surface. This is especially true where the surface is in a protected area that doesn't benefit from the natural cleansing properties of rainwater.

Recommended Cleaning Method

A gentle clean with a soft brush, warm water and mild detergent followed by a fresh water rinse will maintain the long-term performance of your powder coated products.


In rural or normal urban environments cleaning should occur every six months. In areas of high pollution such as industrial areas, geothermal areas or coastal environments cleaning should occur every three months.

In particularly hazardous locations such as beachfronts, severe marine environments or areas of high industrial pollution cleaning should be increased to monthly.

Recommended Cleaning Products

To protect the surface of your powder coated ARC Fence, do not use strong solvents, strong or abrasive cleaning agents, acidic or alkaline cleaning products or fluids that may be recommended for thinning various types of paint.

It is highly recommended that prior to the use of any cleaning agent a small non visible area of your powder coated ARC Fence be tested to ensure that no visual colour change or damage will occur, particularly with bright or deep colours. The use of any cleaning agent should be carried out in the shade and during cooler temperatures using a soft cloth and gentle wiping only. Please consult with ARC Fences for care and maintenance information specific to your product code.

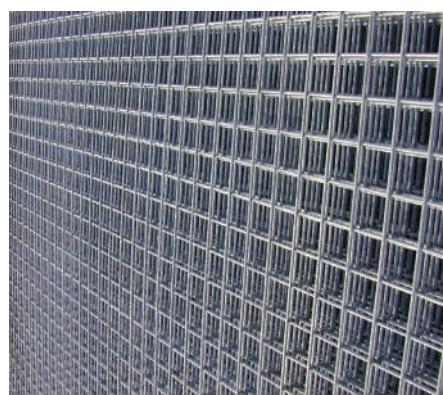

1800 336 237
www.arcfences.com.au

Disclaimer:

Typical end uses for ARC Fences products are displayed in this publication using actual projects and representative images.